

### Feature

- PCB Panel
- CAT6 ISO11801 or TIA/EIA 568C
- IDC compatible with 110 & Krone Tool
- Terminating 4 pairs, 22-26 AWG cable
- Color coded for T568A and T568B Wiring schemes
- Constructed of 4x6 port modules
- Horizontal Punch



### Material

- |                     |   |  |
|---------------------|---|--|
| • Panel             | : | SPCC, 1.5mm thickness                            |
| • RJ45 Jack         | : | PBT  |
| • Housing RJ45 jack | : | Phosphor bronze, Nickel Plated, Gold plated plug |
| • Contact IDC       | : | PC   |
| • Housing           | : | Phosphor bronze, Tin plated Terminal             |
| • IDC Terminal      | : | FR4, 1.6mm thickness                             |

### Performance

- |                         |   |                                   |
|-------------------------|---|-----------------------------------|
| • Wiring Specification  | : | T568A & T568B                     |
| • Insertion force       | : | 20N max                           |
| • Retention Strength    | : | 7.7Kg between jack and plug       |
| • Operating Temperature | : | -20 to 60 degree delicious        |
| • Life (mating cycles)  | : | 750 cycles min                    |
| • IDC tool              | : | Suitable for 22-26 AWG solid wire |



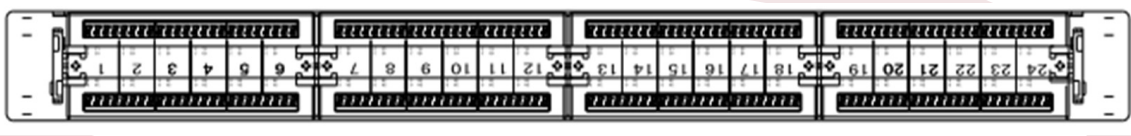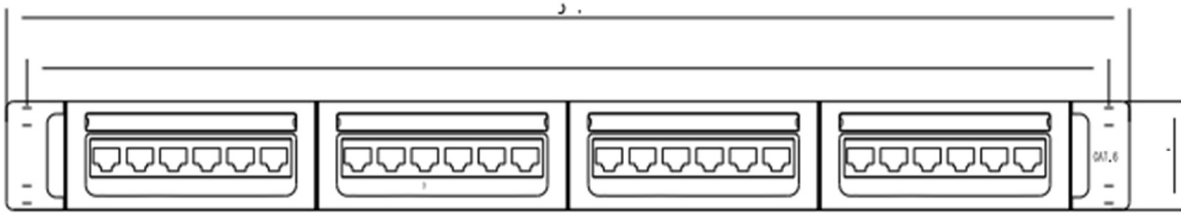

Part Number	Item Description
PP06U24L	CAT6 UTP 24 port patch panel fully loaded